

# HM 600P

YOUR PARTNER FOR INNOVATIVE MARKING

- COMPACT PRINTER DISPENSER WITH HIGH PERFORMANCE
- QUICK CHANGE OF PRODUCTS
- EASY OPERATION – DISPLAY WITH STRONG BACKLIGHT AND 100 PROGRAMS
- FLEXIBLE - UP TO 170 MM LABEL WIDTH
- OPERATES WITH DATAMAX, ZEBRA, VALENTIN, CAB AND SATO PRINT ENGINES



## HM 600P – High performance printer dispenser solution



The HM 600 is a printer dispenser with high performance and efficiency. The control panel is integrated in the machine and built on a high-powered microprocessor ensuring high stability which, along with the stepper motor control, ensures high accuracy. The printer dispenser is highly flexible and is able to operate with up to 170 mm label width. The HM 600P can be operated with a remote display to ensure easy operation.

**HM**<sup>®</sup>  
SYSTEMS

LABELLING · PRINT & APPLY · INK-JET · SOLUTIONS · SOFTWARE · SERVICE

# HM 600 P

## TECHNICAL SPECIFICATIONS

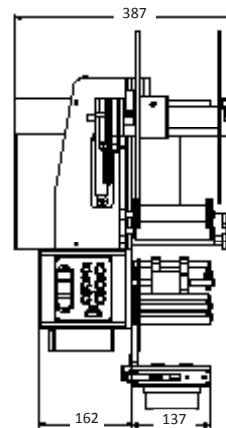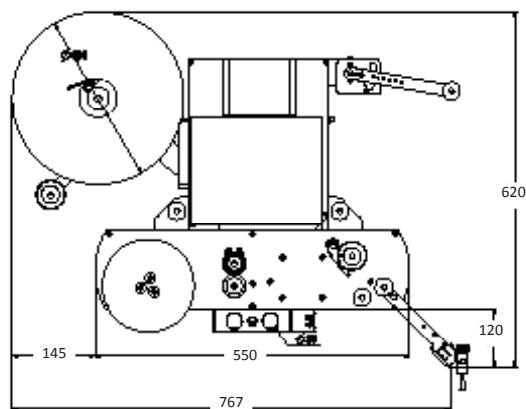

Applications .....	Top, side, and bottom. Modules for corner labelling and stamping optionally available	EXTRA IN AND OUTPUT	
		Encoder input .....	The machine speed automatically follows the product speed of 0-40 m/min.
LABELS		Alarm output.....	Relay output for "out of stock" (zero-potential)
Label width.....	15-170 mm	Extra outputs.....	2 outputs, max. 500 mA for external control of pneumatics in connection with labelling
Label length .....	15-2000 mm	Alarm input.....	Printer error input allows locking the dispenser
Label detector .....	Interspace (min. 2 mm) option: reflective		
Label reel core diameter ...	Ø 40 mm, option: Ø 76 mm	MACHINE SPECIFICATION	
Unwinder diameter .....	Ø 300 mm	Material .....	Anodized aluminium and stainless steel
Material .....	Selfadhesive labels with backing paper	IP protection.....	IP 32
DISPENSING		Dimensions (HxWxD) .....	897 + brush x 603 + brush x 386 mm
Labelling speed.....	0-40 m/min / 120mm label width	Weight (approx.) .....	22 kg
Labelling speed.....	0-30 m/min / 170mm label width	Voltage/Power .....	230 V / 150 W
Labelling accuracy .....	+/- 0.5 mm	Approbation.....	CE
Motor drive .....	Stepper motor	Warranty .....	1 year with 8 hours of operation per day, 5 days a week
Right and left hand version	Both options available	OPTIONS	
Out of stock alarm.....	Zero-potential relay	Fittings.....	H base, spindle system
Program database.....	100 programs	Applicator.....	Corner, stamp
OPERATION		Lights .....	Red alarm light
Display.....	2 x 24 character display with backlight - 180° reversible	Label low warning.....	Sensor detecting diameter
Keyboard .....	6 keys	Non-stop operation.....	Double s ystem switching automatically between two dispensers
Language .....	DK, GB, D, NL, F, I		
INTERNAL CONTROL			
Electronics.....	Microprocessor		

Subject to changes

ALL IPR RESERVED HM SYSTEMS

**HM**<sup>®</sup>  
SYSTEMS